


Test Hoses, Fittings & Test Box

Test Points - Series 20 (M16 x 2)	8.02
Adaptors - Series 20 (M16 x 2)	8.02
Bulkhead - Series 20 (M16 x 2)	8.03
Test Box	8.03
Test Hose - M16 x 2 Female - M16 x 2 Female	8.04
Test Hose - M16 x 2 Female - 1/4" BSPP Gauge	8.04
Test Hose - M16 x 2 Female - 1/2" BSPP Gauge	8.04



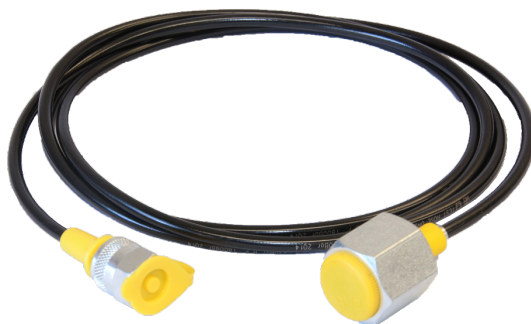

Test Points - Series 20 (M16 x 2)

Specifications:




Max. Working Pressure : 630 bar
 Material : Carbon Steel
 Seal Material : NBR (Buna-N)
 Temp Range : -20 °C ~ +100°C



Order Code	Thread	Cross Sectional View	Valve Sealing Type
PT-06-B	G 1/8 Dowty Seal	 <p>Ball Type</p>	Ball
PT-06-C	G 1/8 Encapsulated Seal		Poppet
PT-07-B	G 1/4 Dowty Seal		Ball
PT-07-C	G 1/4 Encapsulated Seal		Poppet
PT-08-B	G 3/8 Dowty Seal		Ball
PT-08-C	G 3/8 Encapsulated Seal		Poppet
PT-09-B	G 1/2 Dowty Seal		Ball
PT-09-C	G 1/2 Encapsulated Seal		Poppet
PT-21-C	G 3/4 Encapsulated Seal		Ball
PT-10	7/16" UNO	 <p>Poppet Type</p>	Poppet
PT-11	1/2" UNO		Poppet
PT-12	9/16" UNO		Poppet
PT-15	1/8" BSPT		Poppet
PT-16	1/4" BSPT		Poppet
PT-17	3/8" BSPT		Poppet


Adaptors - Series 20 (M16 x 2) (No Valve Sealing)



Order Code	Thread	Cross Sectional View
PTA-01	1/4" BSPP Gauge x Series 20 Male	
PTA-02	1/2" BSPP Gauge x Series 20 Male	
PTA-03	1/4" BSPP Gauge x Series 20 Female	
PTA-04	1/2" BSPP Gauge x Series 20 Female	
PTA-05	Test Hose Connector Series 20 Male x Series 20 Male	
OR-4.2x1.9-N70	Suits PTA-01, PTA-03 & P300 Test Hose End	
OR-6.2x1.9-N70	Suits PTA-02, PTA-04 & P400 Test Hose End	

Bulkhead - Series 20 (M16 x 2)

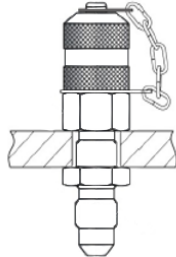

Order Code	Thread	Valve Sealing Type	Cross Sectional View
PTG-01	7/16" JIC Male	Ball	
PTG-02	1/2" JIC Male		
PTG-03	9/16" JIC Male		

Test Box



These robust moulded plastic boxes protect and makes carrying your test equipment easy.

They can hold:

- 3 x 63 mm Pressure Gauges (bottom entry without Manual Vent)
- 6 x Test Points.
- 6 x Test Hoses (depends on length)

Note: All these items are sold separately

Order Code	Description
BDTK-B	Test Kit Box (Black)
BDTK-G	Test Kit Box (Green)

Test Hoses - Series 20



M16 x 2 Female - M16 x 2 Female



M16 x 2 Female - 1/2" BSPP Gauge

Note: Spanner Flats on M16 x 2 connection to make removal easier.

M16 x 2 Female - M16 x 2 Female

Order Code	Length
HF-H0200-1-H0200-1-2-P63-500	500 mm
HF-H0200-1-H0200-1-2-P63-1000	1000 mm
HF-H0200-1-H0200-1-2-P63-1500	1500 mm
HF-H0200-1-H0200-1-2-P63-2000	2000 mm
HF-H0200-1-H0200-1-2-P63-2500	2500 mm
HF-H0200-1-H0200-1-2-P63-3000	3000 mm
HF-H0200-1-H0200-1-2-P63-7000	7000 mm
HF-H0200-1-H0200-1-2-P63-8000	8000 mm

M16 x 2 Female - 1/4" BSPP Gauge

Order Code	Length
HF-H0200-1-P0300-2-P63-500	500 mm
HF-H0200-1-P0300-2-P63-1000	1000 mm
HF-H0200-1-P0300-2-P63-1500	1500 mm
HF-H0200-1-P0300-2-P63-2000	2000 mm
HF-H0200-1-P0300-2-P63-2500	2500 mm
HF-H0200-1-P0300-2-P63-3000	3000 mm

M16 x 2 Female - 1/2" BSPP Gauge

Order Code	Length
HF-H0200-1-P0400-2-P63-500	500 mm
HF-H0200-1-P0400-2-P63-1000	1000 mm
HF-H0200-1-P0400-2-P63-1500	1500 mm
HF-H0200-1-P0400-2-P63-2000	2000 mm
HF-H0200-1-P0400-2-P63-2500	2500 mm
HF-H0200-1-P0400-2-P63-3000	3000 mm
HF-H0200-1-P0400-2-P63-7000	7000 mm
HF-H0200-1-P0400-2-P63-7800	7800 mm

DN2-630 Test Hose Technical Information

ID = 2 mm

Max. Operating Pressure = 630 bar

OD = 5 mm

Min. Burst Pressure = 1800 bar

Min. Bending Radius = 20 mm

Temp. Range = - 40 °C ~+100 °C